


Fixed guide type

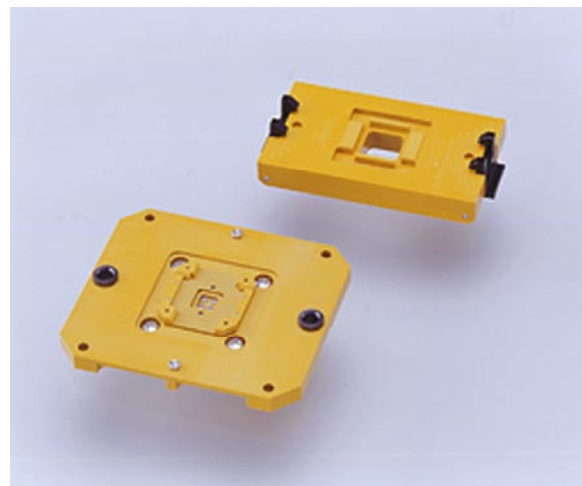

Floating type

## Applications


- For function testing of QFP and SSOP (TSSOP) packages

## Features

- Pitches available from 0.65 to 0.40mm.
- Contact probes can be removed one by one. It is convenient for users to replace pins.
- It is also suitable for other types of package with leads.

## Probe

- For 0.4mm pitch

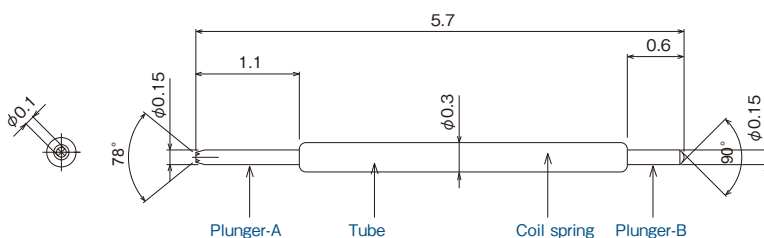

- For 0.65 to 0.50mm pitch
- Incorporating high performance, high durability and high reliability contact probe (0.65 mm to 0.5 mm pitch)