


Coil Connector



- 1: ϕ 4.5mm Coil-connector in Elastic Holder for Microphone
 2: ϕ 6.0mm Coil-connector in Elastic Holder for Microphone

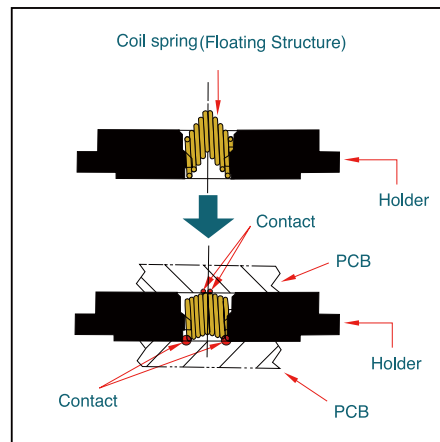

Basic Structure

Applications

Signal use in Cellular components including :

- Microphone - PCB Connector
- Buzzer - PCB Connector
- Receiver - PCB Connector
- LCD - PCB Connector
- Others

Features

- Available ultra low profile connection between contact points to PCB.
- High contact reliability thanks to multi-contact points.
- Absorb the assembling tolerance in the component by wide working stroke.