




1:  $\phi$ 4.5mm Coil-connector in Elastic Holder for Microphone

2:  $\phi$ 6.0mm Coil-connector in Elastic Holder for Microphone

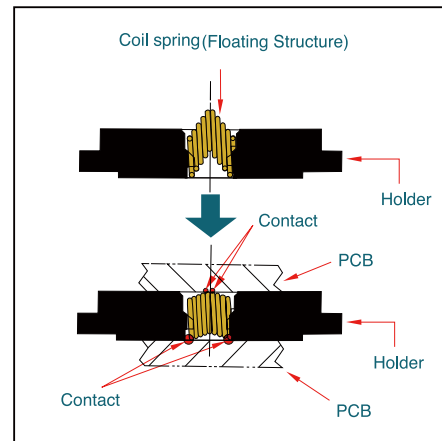

Basic Structure

## Applications

Signal use in Cellular components including :

- Microphone - PCB Connector
- Buzzer - PCB Connector
- Receiver - PCB Connector
- LCD - PCB Connector
- Others

## Features

- Available ultra low profile connection between contact points to PCB.
- High contact reliability thanks to multi-contact points.
- Absorb the assembling tolerance in the component by wide working stroke.